
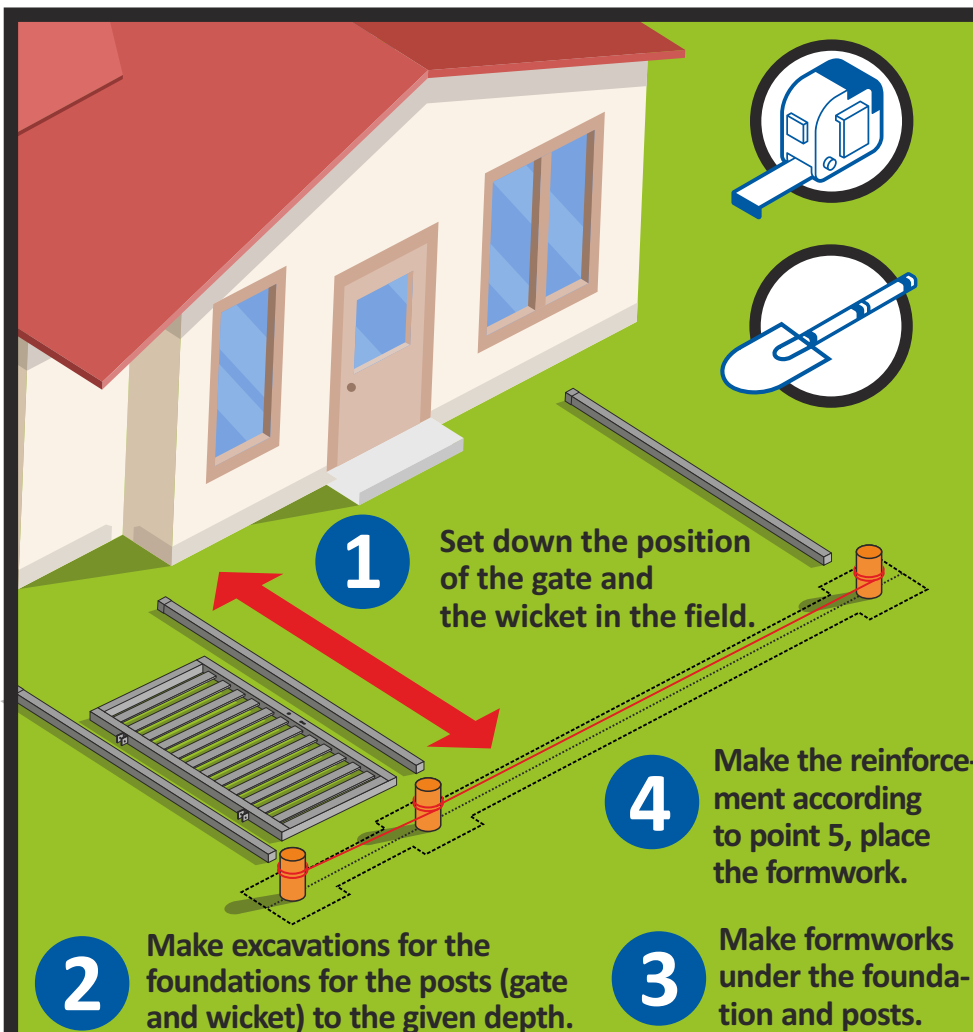


DOUBLE-LEAF GATE INSTALLATION MANUAL WITHOUT AN AUTOMATIC AND WICKET

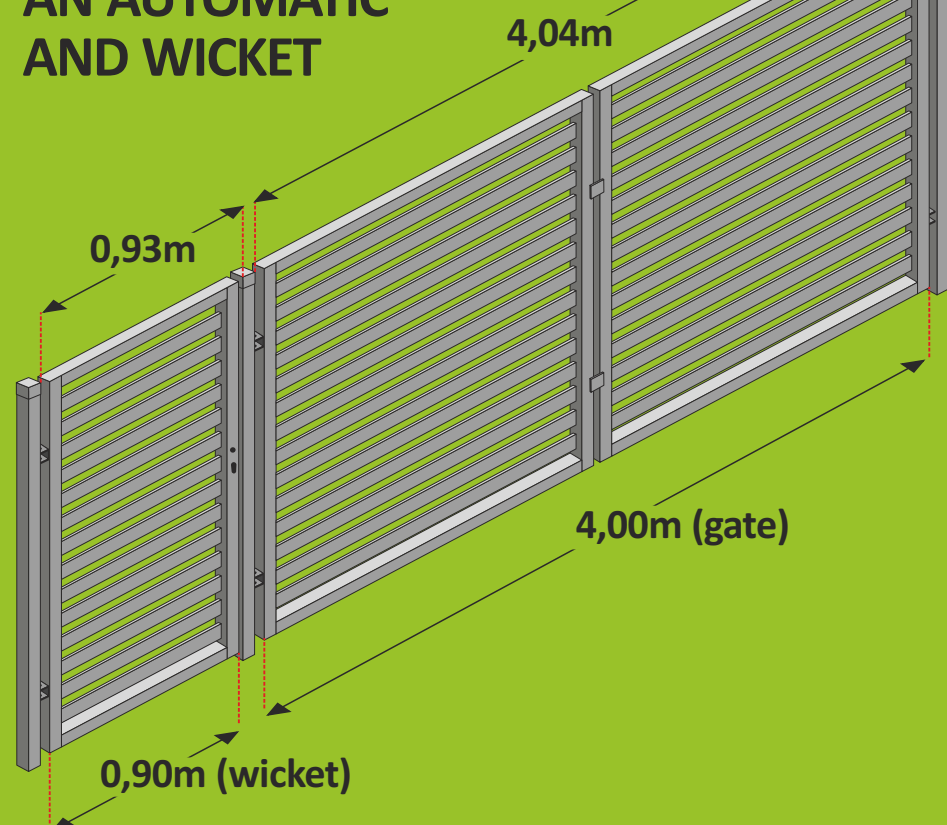

5 In the pillar foundations put in reinforcement made of 4 reinforced bars $\varnothing 12$ mm, length 110 cm, connected by stirrups from a smooth bar $\varnothing 6$ mm, 30x30 cm, spaced every 15 cm. Place a reinforcement made of a ribbed bar $\varnothing 12$ mm in a quantity of 4 pieces (length depending on the width of the gate) connected with stirrups made of a smooth bar $\varnothing 6$ mm (size 20x30 cm) with a spacing of 25 cm.

6 The horizontal frame should be folded together with the posts maintaining the linearity of all elements.

7 This complex gate should be stabilized using wooden or other elements (eg.: boards, treated sawn timbers, profiles).



12 Make the formwork and concreting of the supplementary elements between the posts, keeping in mind the placement of items blocking the gates

- the lower gate bold lock
- lock gate
- upper gate bold lock.

13 It is recommended to mount a gate stop to secure the door hinges before damaging them.

REINFORCEMENT OF THE FOUNDATION FOR THE POSTS AND WICKET FROM THE GROUND

